

Horizon SST Installation Photos

2018+ Honda GL1800

P/N: SST01140

***IMPORTANT:
PLEASE GIVE CUSTOMER ENCLOSED INFORMATION!***



Thank you for your HeliBars® purchase.

HeliBars are designed to increase your long distance comfort and improve the handling of your motorcycle, and we feel confident you will enjoy them. The Horizon SST is the most technologically advanced handlebar system to ever grace a motorcycle. Many safety features have been included in the design. It is of the utmost importance the bars are installed by a mechanic with good mechanical skills following the installation instructions provided.

HeliBars INSTALLATION

DANGER: IMPROPER INSTALLATION COULD RESULT IN SERIOUS INJURY OR DEATH. HAVE A QUALIFIED MECHANIC INSTALL YOUR HeliBars.

BRAKE FLUID CAN BE CORROSIVE TO PLASTIC & PAINT. PLEASE USE CAUTION WHEN WORKING WITH YOUR HYDRAULIC SYSTEMS. ENSURING ALL WORK AREAS ARE PROTECTED.

AFTER INSTALLATION, MOVE BARS LOCK TO LOCK AND CHECK CLEARANCE OF: 1.CABLES 2. HYDRAULIC LINES 3.WIRES 4.FAIRING 5.FUEL TANK. TORQUE ALL HARDWARE TO MANUFACTURER'S SPECIFICATIONS.

IF YOU HAVE INSTALLATION QUESTIONS, PLEASE CALL 1-800-859-4642.



WARRANTY / RETURN POLICY

We make every effort to build a quality product so you can fully enjoy your riding experience. Thank you for your order.

HeliBars® may be returned for defects in materials and workmanship within one year from the date of shipment to the original purchaser, in which event the purchaser may receive a replacement set of HeliBars.

If within thirty (30) days of the shipping date you are not satisfied for any reason, you can return the HeliBars. Return policy is valid for original purchaser only. If HeliBars are purchased from a vendor other than Heli Modified, Inc., customer must contact vendor where purchased regarding returns. Refund will be extended to original purchaser only. There are no other warranties which extend beyond this.

Conditions of this 30 day return policy:

- 1. Bars must not be used as a tie down point. (See attached ‘Trailer Instructions’).**
- 2. Bars cannot be damaged, dented, or altered in any way.**
- 3. Bars cannot be overtorqued.**
- 4. Refund will be for product purchase price only, and credited to original purchaser only.**
- 5. Product must be returned with all original equipment, documents and in original packaging. There must be no physical damage caused by the customer or by carrier.**
- 6. A Return Authorization Number must be obtained from us before you return the product.**

We reserve the right to charge a re-stocking fee of up to 25% if the above criteria are not met.

THERE ARE NO FURTHER EXPRESS OR IMPLIED WARRANTIES INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. By accepting this product, the consumer agrees to arbitrate and litigate any controversy in the State of Maine, and under the laws of the State of Maine.

HELI MODIFIED INC. ASSUMES NO LIABILITY FOR ANY INJURY OR LOSS OF PROPERTY WHICH RESULT FROM IMPROPER INSTALLATION OR USE OF ANY HELI BARS. ALL HELI MODIFIED, INC. PRODUCTS SHOULD BE INSTALLED BY A QUALIFIED MECHANIC. IMPROPER INSTALLATION MAY CAUSE DEATH OR INJURY.

Ride Safe and Enjoy!





Installation Photos
2018+ Honda GL1800
P/N: SST01140

Height: 0-3 inches ~ Set Back: 0-4 inches ~ Wrist Angle Adjustments: 36 Degree Sweep

Installation Overview:

- 1.) Place a protective cover over fuel tank and fairing to protect painted surfaces. Use of the factory service manual is highly recommended to aid in installation.
- 2.) Tools: All hardware on the Horizon Handlebar system is metric. An accurate torque wrench is required, as well as drives, to perform installation and for torquing pinch bolts after adjustments are made.

Required Tools:

- 1/4 & 1/2 drive ratchet
- 14MM & 8MM Sockets
- 13MM Open End Wrench
- 5mm Ball Nose Allen
- 5MM/6MM/8MM Hex (Allen) Drive
- Phillips Screw Driver
- Spade Screwdriver
- Torque Wrench
- 3/16" Allen Wrench

**!! CAUTION!! BARS MUST BE TORQUED TO
SPECIFIED VALUES.
THEY MUST NOT BE OVERTORQUED.
OVERTIGHTENED HARDWARE CAN LOSE INTEGRITY.**

For questions regarding installation please call 1-800-859-4642.

**HELI MODIFIED, INC ASSUMES NO LIABILITY FOR ANY INJURY OR LOSS OF
PROPERTY WHICH MAY RESULT FROM IMPROPER INSTALLATION OR USE OF
ANY HELIBARS.**



Photo # 2



Photo # 4



Photo # 1



Photo # 3





Photo # 6



Photo # 8



Photo # 5



Photo # 7





Photo # 10

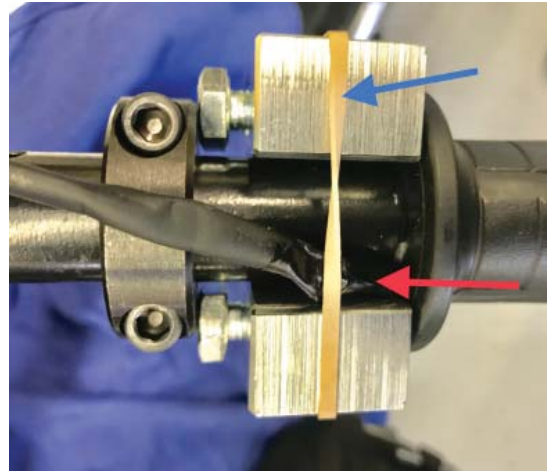


Photo # 12



Photo # 9



Photo # 11



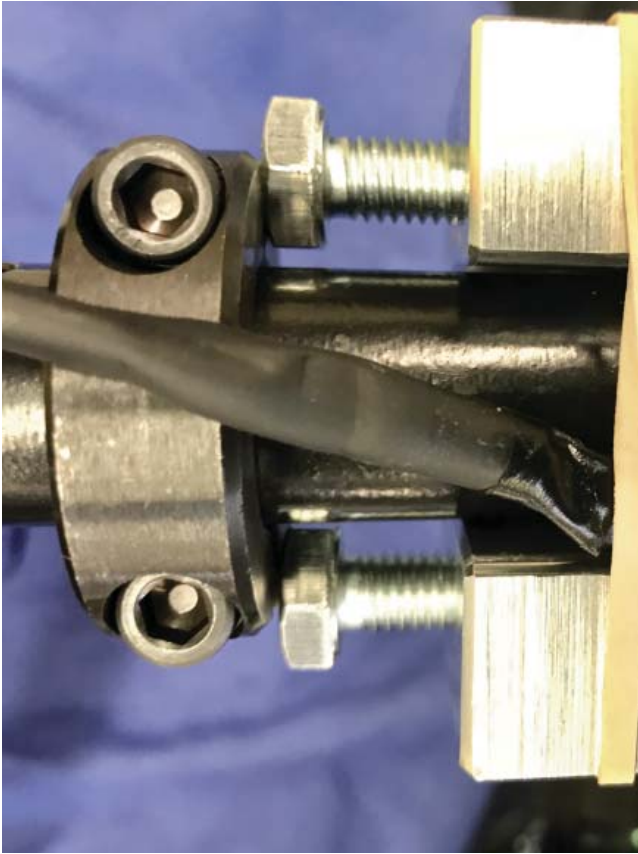


Photo # 14



Photo # 16

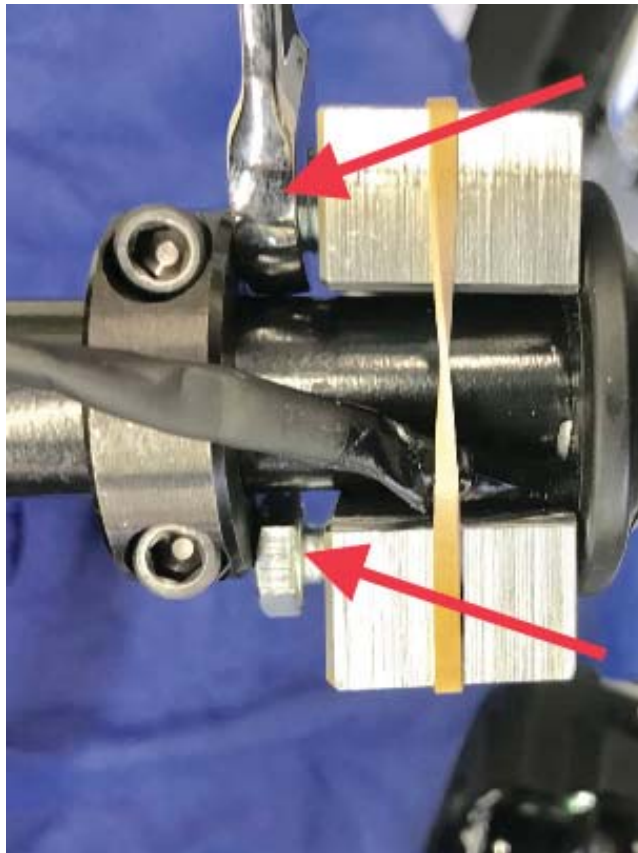


Photo # 13



Photo # 15



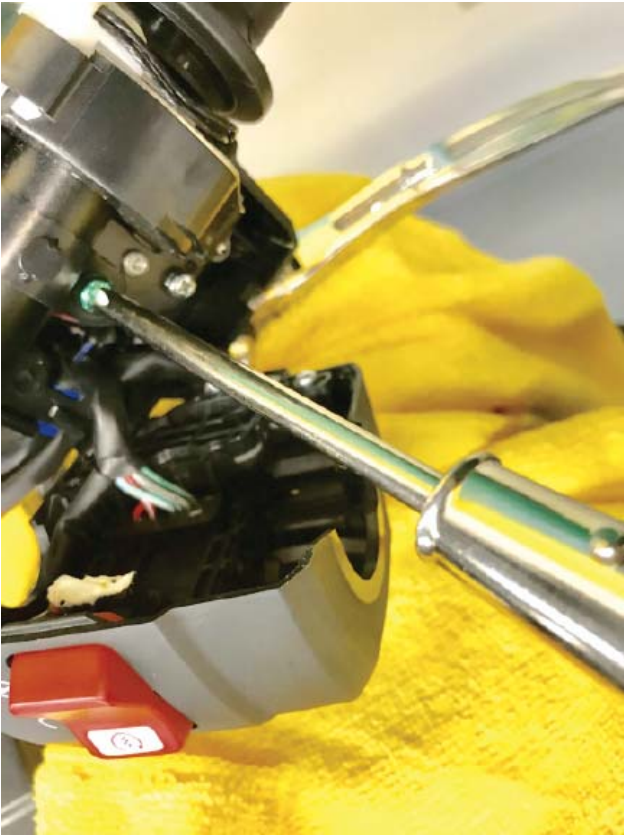


Photo # 18



Photo # 20



Photo # 17

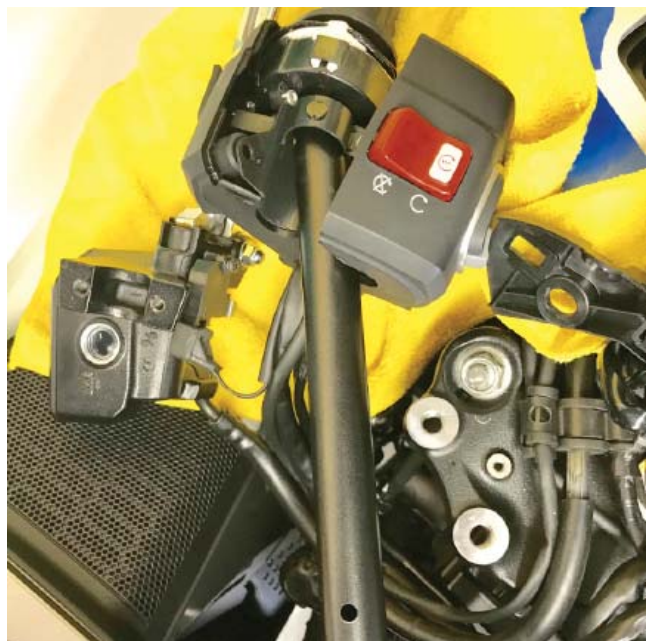


Photo # 19





Photo # 22



Photo # 24



Photo # 21



Photo # 23



Photo # 26



Photo # 28

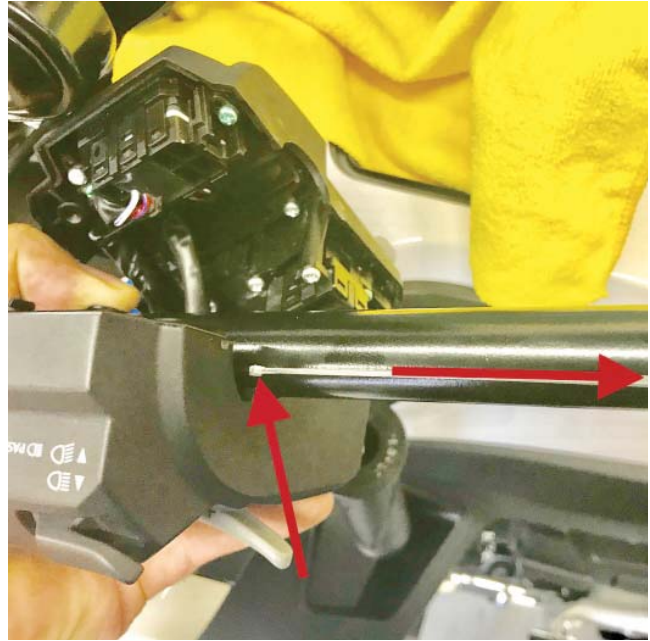


Photo # 25



Photo # 27





Photo # 30

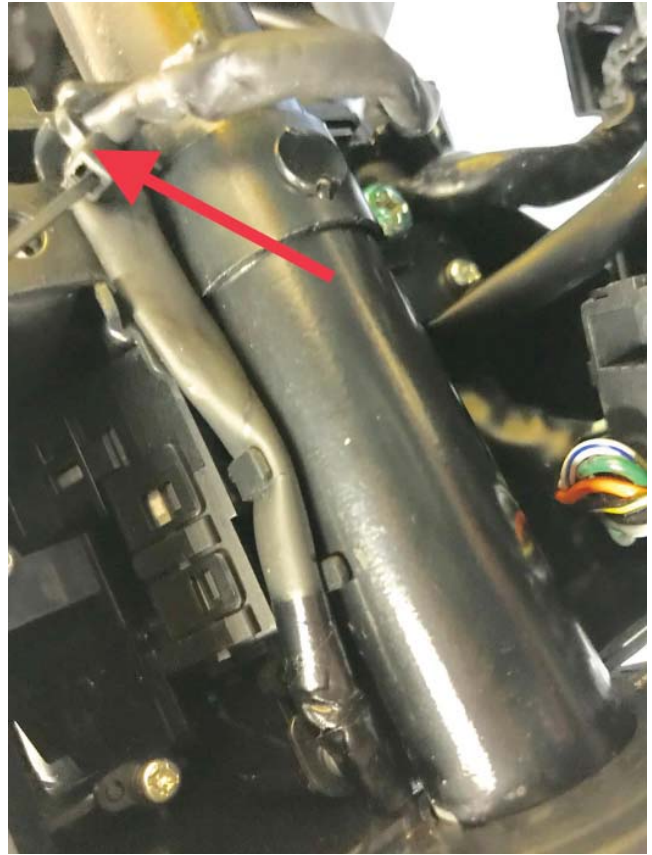


Photo # 32

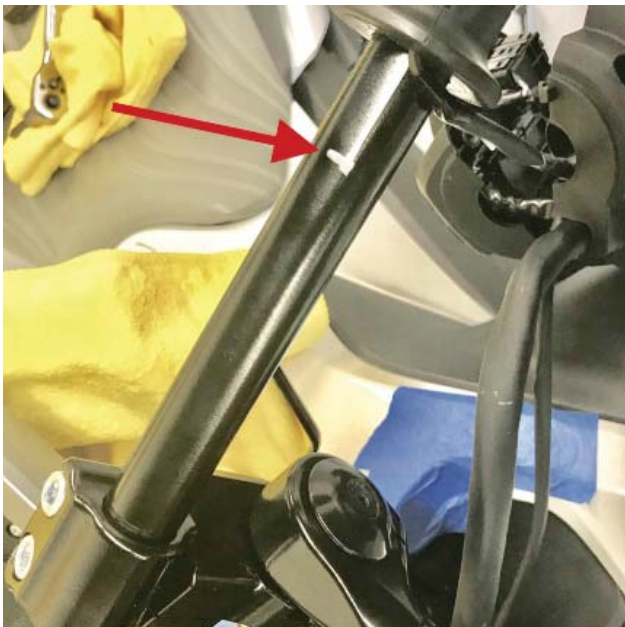


Photo # 29



Photo # 31



Photo # 34



Photo # 36



Photo # 33



Photo # 35





Photo # 38



Photo # 40



Photo # 37



Photo # 39





Photo # 42

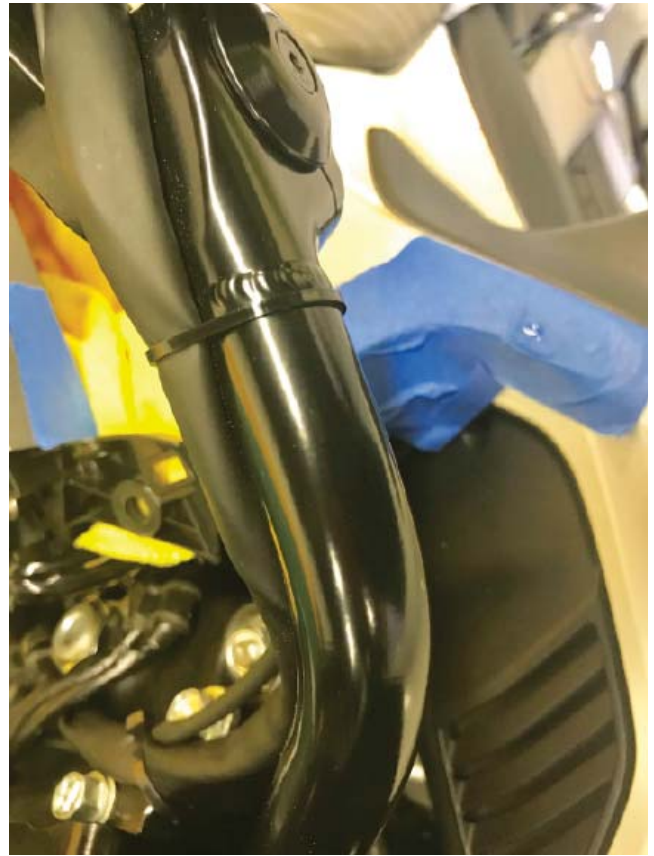


Photo # 44



Photo # 41



Photo # 43





Photo # 46



Photo # 45



Photo # 47



IMPORTANT INFORMATION ABOUT POWDER COATED HELIBARS

HeliBars® are finished with a polyester powder coating. The polyester is recommended for outdoor use because of its excellent UV resistant quality; if we were to use an epoxy it would tend to fade and chalk pretty quickly when exposed to sunlight and UV rays.

Care must be taken during installation because the finish can be scratched by the sharp surfaces of the controls and master cylinder clamps. When mounting the master cylinders to bars, do not let them move around the bars with the caps loose. Mount them in the proper position and hand tighten the screws until final adjustments are made; in this way you will lessen the possibility of scratching.

NOTE: Powder coat finish is not indestructible, there are chemicals which may react negatively when applied to finish. Brake fluid may cause deterioration of the finish. We do not recommend the use of acetone or similar chemicals for cleaning purposes. We would recommend the use of an over-the-counter adhesive remover (such as Goo Gone) for the removal of any extraneous material. Please read labels directions for any cleaning/polishing product before use. If you have any questions regarding the use of any over-counter-products with the HeliBars, please call us before applying them to the powder coated finish.

If care is taken during installation, your HeliBars will continue to look as good as when they were new. They will look great for years to come with a bit of wax and careful cleaning. Thank you for your purchase, ride safe and enjoy!

Sincerely,

Harry Eddy, President

